IN-LINE SPRING FOOT VALVE

JD Series

SOCKET JD100 / THREAD JD200
Size: 1/2"- 2"

Test Press:15kgf/cm²(bar) 225psi **Working Press:10kgf/cm² (bar) 150psi**

MATERIALS OF CONSTRUCTION

No	Part	Material	PCS
1	UPPER BODY	UPVC	1
2	FILTER	UPVC	1
3	SEAL	EPDM	1
4	SPIGOT	UPVC	1
5	SPRING	SUS 304	1

DIMENSIONS TABLE

Nom \ SIZE			15mm (1/2")	20mm (3/4")	25mm (1")	32mm (1-1/4")	40mm (1-1/2")	50mm (2")
d	JIS (mm)	Socket	20	26	32	38	48	60
		Thread	PT1/2	PT3/4	PT1	PT1-1/4	PT1-1/2	PT2
	ANSI (inch)	Socked	0.840	1.050	1.315	1.660	1.900	2.375
		Thread	NPT1/2	NPT3/4	NPT1	NPT1-1/4	NPT1-1/2	NPT2
	DIN (mm)	Socked	20	25	32	40	50	63
		Thread	R1/2	R3/4	R1	R1-1/4	R1-1/2	R2
P		JIS(mm)	22.2	25.4	28.6	31.8	34.9	38.1
		ANSI(inch)	0.875	1.000	1.125	1.250	1.375	1.500
		DIN(mm)	16.0	18.5	22.0	26.0	31.0	37.5
D1			17	21	28	35	40	52
D2			35	35	45	52	60	73
D3			37	37	47	54	62	75
B			56	56	71	102	102	114
L			129	129	149	173	173	211

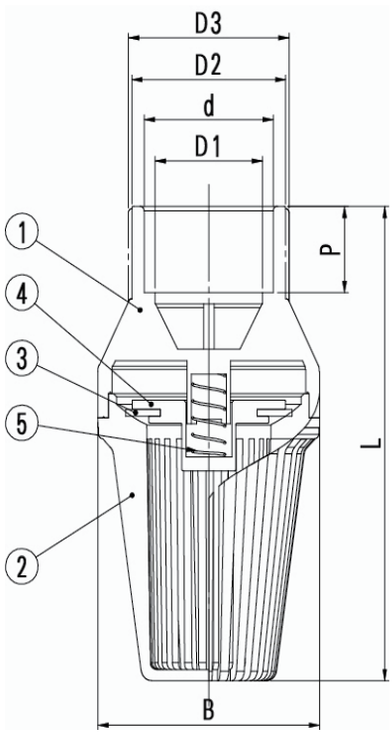

Tel: 886-4-2626 6926 Fax: 886-4-2626 7169 E-mail: shvalve@ms23.hinet.net http://www.shieyu-valve.com.tw